

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
11 April 2002 (11.04.2002)

PCT

(10) International Publication Number  
**WO 02/28745 A1**

(51) International Patent Classification<sup>7</sup>: **B65D 85/10**

(21) International Application Number: **PCT/IB01/01821**

(22) International Filing Date: 1 October 2001 (01.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
**BO2000A000576** 3 October 2000 (03.10.2000) **IT**

(71) Applicant (for all designated States except US): **G.D S.p.A.** [IT/IT]; Via Battindarno, 91, I-40133 Bologna (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CONTI, Igino**

[IT/IT]; Via Vallescura, 31, I-40136 Bologna (IT).  
**DRAGHETTI, Fiorenzo** [IT/IT]; Via San Donino, 506, I-40059 Medicina (IT). **PERSI, Patrizia** [IT/IT]; Via Togliatti, 6, I-40050 Monte S. Pietro (IT).


(74) Agents: **BIANCIARDI, Ezio et al.**; Bugnion S.p.A., Via Goito, 18, I-40126 Bologna (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: **PACK OF RIGID TYPE FOR TOBACCO PRODUCTS**

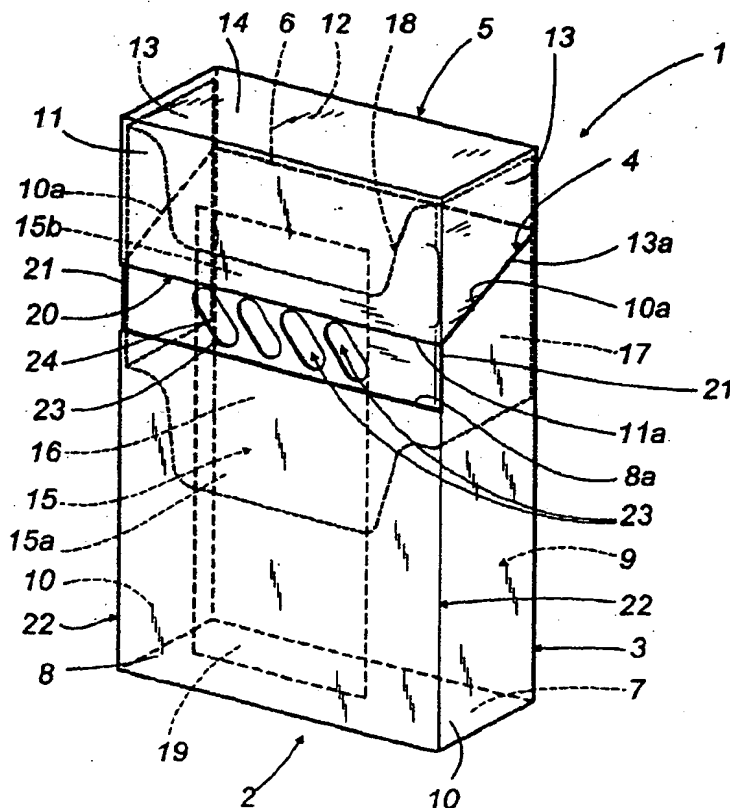

(57) Abstract: A pack of rigid type with a hinged lid for tobacco products comprises a cupped container (3; 26) presenting a front face (8) and two flank faces (10) of which the free edges (8a, 10a) combine to establish an open end (4) of the container, also a reinforcing frame (15) secured to the container (3; 26), presenting a breast piece (16), two side pieces (17) and a top edge (18) of U profile directed toward the lid (5; 27). The lid (5; 27) likewise is cupped, presenting a front face (11) and two flank faces (13) with respective free edges (11a; 13a), and closes the open end (4) of the container (3; 26). A coupon (19) is included in the pack, between the frame (15) and the tobacco products. With the lid (5; 27) occupying the closed position, the free edges (8a, 11a) presented by the front faces (8, 11) respectively of the container (3; 26) and of the lid (5; 27) are separated one from the other by a given distance to create an opening (20) partially exposing the breast piece (16) of the frame (15), which in turn presents at least one window (23) serving to reveal at least one portion (24) of the coupon (19).

WO 02/28745 A1



patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— with international search report

DescriptionPack of rigid type for tobacco productsTechnical Field

The present invention relates to a pack of rigid type for tobacco products.

Background Art

In the following specification, the term "pack" can be taken to mean both a carton containing a plurality of packets of cigarettes, and a single packet containing a group of cigarettes or tobacco products in general.

Rigid packs of the type in question are fashioned generally from respective flat precreased diecut blanks, the single pack comprising a container and a lid which, in the case of the packet in particular, is attached hingedly to a rear edge of the container in such a way as to enclose an open end of the selfsame container, also a reinforcing frame disposed partly inside the container and secured thus internally to a front face and to two flank faces of the selfsame container.

It is increasingly the practice to print advertisements, messages and other written matter on the outer surface of these packs, addressed to the consumer, which must be placed clearly in view, expressed in the language of the various countries where the product is sold and, moreover, customized

on a case by case basis to ensure conformity with national statutory requirements in different countries.

5 In certain countries it is also normal for the price of the product to be printed on the outer surface of the pack and, especially in those countries where changes in price are frequent due to significant inflationary factors, the written matter printed on the pack must often be changed and adapted  
10 in response to market conditions.

All this dictates that the diecut blanks used to fashion the packs must be differentiated from country to country, and even for each individual country, with resulting high inventory and production costs.

15 It is also the practice to manufacture packs of the type in question furnished internally with inserts, namely cards, coupons and the like, bearing written and pictorial images addressed to the consumer.

The object of the present invention is to avoid the  
20 use of different blanks, since the blank represents the most costly part of the pack, adopting a single standard blank for all countries and utilizing the inserts as the background on which to print the advertisements, messages and other written matter  
25 addressed to the consumer.

#### Disclosure of the Invention

The stated object is realized according to the present invention in a pack of rigid type with a hinged lid for tobacco products, comprising a

container of cupped embodiment presenting a bottom end face and a rear race, also a front face and two flank faces of which the free edges define an open end of the selfsame container; a reinforcing frame presenting a breast piece and two side pieces associated respectively with the front face and flank faces of the container, projecting partly from the open end of the container and delimited uppermost by an edge of U profile directed toward the lid; the lid likewise of cupped embodiment and presenting a top end face, a front face and two flank faces with respective free edges, and a rear face connected by way of a hinge line to the rear face of the container, rotatable thus between an open position and a position of interaction with the frame in which the open end of the container is closed; and a coupon located between the frame and the tobacco products, characterized in that, with the lid occupying the closed position, at least one part of the free edge afforded by the open end of the container and a part of the free edge of the lid are separated one from the other by a predetermined distance so as to create an opening that serves to expose at least one void portion of the frame serving in turn to reveal at least one corresponding portion of the coupon.

The invention will now be described in detail, by way of example, with the aid of the accompanying drawings, in which:

-figure 1 illustrates a first embodiment of a packet of cigarettes according to the present invention,

viewed schematically and in perspective;

-figure 2 illustrates a second embodiment of a packet of cigarettes according to the present invention, viewed schematically and in perspective;

5 -figures 3 to 8 illustrate respective further embodiments of the packets of cigarettes illustrated in figures 1 and 2, viewed schematically and in perspective;

10 -figures 9 and 10 illustrate two possible embodiments of rigid cartons for packets of cigarettes according to the present invention, viewed schematically and in perspective;

-figure 11 illustrates a third embodiment of a packet of cigarettes according to the present invention, viewed schematically and in perspective.

15 With reference to figures 1 and 2 of the drawings, 1 denotes a pack for tobacco products, in its entirety, consisting more exactly in a rigid packet 2 intended to contain a group of cigarettes (not 20 illustrated), comprising a container 3 of cupped embodiment affording an open top end 4, surmounted by a lid 5 likewise of cupped embodiment, hinged to the container 3 along a relative hinge line 6 and rotatable thus between an open position (not 25 illustrated), and a position in which the top end 4 is closed.

The container 3 presents a bottom end face 7, a front face 8, a rear face 9 and two flank faces 10, of which the front face 8 and flank faces 10 present 30 respective free top edges 8a and 10a defining the

open top end 4, that is to say the end directed toward the lid 5, which in like manner presents a front face 11, a rear face 12, two flank faces 13 and a top end face 14.

5       The front face 11 and flank faces 13 of the lid 5 present respective free edges 11a and 13a defining an open end offered to the container 3 when the selfsame lid 5 is in the closed position.

10       The single packet 2 accommodates an inner wrapper (not illustrated) enveloping a group of cigarettes, and is furnished with a reinforcing frame 15, interposed between the packet 2 and the inner wrapper and secured thus to the container 3. The frame 15 comprises a portion 15a located internally of the  
15       container 3 and a portion 15b projecting externally of the container from the open top end 4.

More exactly, the frame 15 is composed of a breast piece 16 located partly in contact with the inside of the front face 8 of the container 3, and two side  
20       pieces 17 secured in part to the insides of the flank faces 10 of the container 3.

The breast piece 16 of the frame 15 is delimited uppermost by an edge 18 of "U" outline disposed with the concave profile directed toward the lid 5.

25       Lastly, each packet 2 is furnished with a coupon 19 interposed between the frame 15 and the inner wrapper. More exactly, the coupon 19 is positioned below the breast piece 16 of the frame 15 and partly in contact with the inside of the front face 8 of the  
30       container 3, in such a way that its top end extends

beyond the top edge 18 of the frame 15.

In the example of figure 1, where the hinged lid 5 occupies the position in which the open top end 4 of the container 3 is enclosed, the two flank edges 13a of the lid 5 are disposed in contact with the flank edges 10a of the container 3, whilst the edge 11a presented by the front face 11 of the lid 5 is separated by a given distance from the edge 8a presented by the front face 8 of the container 3, in such a way as to create an opening 20 compassed peripherally by the edge 11a of the front face 11 of the lid 5, the edge 8a of the front face 8 of the container 3, and two cuts 21 made along the top part of each corner edge 22 bordering the front face 8.

The opening 20 serves to expose a given area of the breast piece 16 presented by the frame 15, which exhibits a plurality of windows 23 consisting in respective void portions of the frame 15 positioned to reveal corresponding portions 24 of the coupon 19 bearing written and pictorial matter addressed to the consumer, thereby obviating the need to print such matter directly on the packet 2.

In the example of figure 2, the opening 20 is positioned to coincide with the top edge 18 of "U" outline presented by the frame 15, which therefore is not pierced with windows 23 as in the example of figure 1; instead, the void portion of the frame 15 is compassed between the top edge 18 of the frame 15 and the free edge 11a presented by the front face 11 of the lid 5 when the lid occupies the position



enclosing the open top end 4 of the container 3.

Likewise in this instance the void portion of the frame 15 is positioned to expose corresponding portions 24 of the coupon 19 bearing written and pictorial matter addressed to the consumer, thereby obviating the need to print such matter directly on the packet 2.

In both of the examples illustrated in figures 1 and 2, the opening 20 presents the appearance substantially of a rectangle referable to an axis extending parallel with the hinge line 6.

The examples of figures 3 to 8 are variations on the example of figure 1. Figure 3, in particular, illustrates a curved opening 20 generated as a band in the form of an arc to a circle compassed between edges 8a and 11a extending mutually parallel and generated each likewise as an arc to a circle; the window 23 consists in a single void appearing as an arcuate slot.

The example of figure 4 illustrates an opening 20 of substantially rectangular appearance referable to an axis extending skew relative to the hinge line 6, compassed between edges 8a and 11a extending mutually parallel and skew likewise in relation to the hinge line 6, whilst the frame 15 presents a plurality of windows 23, for example of substantially quadrangular outline.

The example of figure 5 illustrates an opening 20 of Vee-shaped appearance compassed between edges 8a and 11a extending mutually parallel and likewise of

Vee shape; the window 23 might also present a Vee shape, by way of example.

The example of figure 6 illustrates an opening 20 of substantially multiangular geometry compassed between edges 8a and 11a extending mutually parallel and likewise of multiangular geometry; the windows 23 might be of triangular outline, by way of example.

The example of figure 7 illustrates an opening 20 of substantially multiangular geometry compassed between edges 8a and 11a that do not extend parallel one with another. In particular, the one edge 11a extends parallel to the hinge line 6 and the other edge 8a appears substantially as a chevron with a rounded vertex directed toward the first edge 11a. The opening 20 exposes a single window 23 in the breast piece 16 of the frame 15, of which the outline is, by way of example, substantially identical to that of the opening 20.

The example of figure 8 illustrates an opening 20 of substantially undulating appearance compassed between edges 8a and 11a extending mutually parallel and likewise of undulating appearance. In this instance the window 23 in the breast piece 16 of the frame 15 presents an undulating outline substantially identical to that of the opening 20.

In the examples of figures 9 and 10, the packs 1 consist in rigid cartons 25 serving to contain a plurality of packets 2 of cigarettes. The geometry of the cartons 25 is similar in all respects to that of the packets 2 illustrated in figures 1 and 2, and

accordingly, the component parts are denoted where possible by the same reference numbers as used to denote the corresponding parts of the packets 2.

5 The single carton 25 comprises a container 26 surmounted by a lid 27, hinged to the container along a relative hinge line 6 and rotatable thus between an open position (not illustrated) and a position in which the open top end 4 of the container 26 is closed, also a reinforcing frame 15 secured to the  
10 container 26, comprising a portion 15a located internally of the container 26 and a portion 15b projecting externally of the container 26, from the open top end 4, toward the lid 27.

15 The breast piece 16 of the frame 15 is delimited uppermost by an edge 18 of "U" outline disposed with the concave profile directed toward the lid 27.

Lastly, the single carton 25 is furnished with a coupon 19 interposed between the frame 15 and the packets 2. More exactly, the coupon 19 is positioned  
20 below the breast piece 16 of the frame 15 and partly in contact with the inside of the front face 8 of the container 26, in such a way that its top end extends beyond the top edge 18 of the frame 15.

Recalling the description already given with  
25 reference to the packets 2, the carton 25 illustrated in figure 9 appears with the lid 27 occupying the position in which the container 26 is closed. The flank edges 13a of the lid 27 are disposed in contact with the flank edges 10a of the container 26, whilst  
30 the edge 11a presented by the front face 11 of the

lid 27 is separated by a predetermined distance from the edge 8a presented by the front face 8 of the container 26 in such a way as to create an opening 20 compassed peripherally by the edge 11a of the lid 27, the edge 8a of the front face 8 of the container 26, and two cuts 21 made along the top part of each corner edge 22 bordering the front face 8. The opening 20 serves to expose a given area of the breast piece 16 presented by the frame 15, which exhibits a plurality of windows 23 consisting in respective void portions of the frame 15 positioned to reveal corresponding portions 24 of the coupon 19 bearing written and pictorial matter addressed to the consumer, thereby obviating the need to print such matter directly on the carton 25.

In the example of figure 10, the opening 20 is positioned to coincide with the top edge 18 of "U" outline presented by the frame 15, which therefore is not pierced with windows 23 as in the example of figure 9; instead, the void portion of the frame 15 is compassed between the top edge 18 of the frame 15 and the free edge 11a presented by the front face 11 of the lid 27 when the lid occupies the position enclosing the top end of the container 26. Likewise in this instance the void portion of the frame 15 is positioned to expose corresponding portions 24 of the coupon 19 bearing written and pictorial matter addressed to the consumer, thereby obviating the need to print such matter directly on the carton 25.

Whilst in both of the examples illustrated in

figures 9 and 10 the opening 20 presents the appearance substantially of a rectangle referable to an axis extending parallel with the hinge line 6, it will be evident that all the embodiments of the opening 20 illustrated in figures 3 to 8 are applicable to packet 2 and carton 25 alike.

The packet 2 shown in the example of figure 11 is similar to the packet 2 of figure 1 in terms of geometry, but with the difference that the coupon 19 is interposed between the breast piece 16 of the frame 15 and the insides of the front face 8 of the container 3 and the front face 11 of the lid 5. In this instance there is no need for the windows 23 in the frame 15 since the opening 20 compassed between the two free edges 8a and 11a of the front faces will reveal at least the portion 24 of the coupon 19 of interest to the consumer.

Claims

1) A pack of rigid type with a hinged lid for tobacco products, typically a pack (1) comprising a container (3; 26) of cupped embodiment presenting a bottom end face (7) and a rear race (9), also a front face (8) and two flank faces (10) of which the free edges (8a, 10a) define an open end (4) of the selfsame container (3; 26); a reinforcing frame (15) presenting a breast piece (16) and two side pieces (17) associated respectively with the front face (8) and flank faces (10) of the container (3; 26), projecting partly from the open end (4) of the container (3; 26) and delimited uppermost by an edge (18) of U profile directed toward the lid (5; 27); the lid (5; 27) likewise of cupped embodiment and presenting a top end face (14), a front face (11) and two flank faces (13) with respective free edges (11a, 13a), and a rear face (12) connected by way of a hinge line (6) to the rear face (9) of the container (3; 26), rotatable thus between an open position and a position of interaction with the frame (15) in which the open end (4) of the container is closed (3; 26); and a coupon (19) located between the frame (15) and the tobacco products, characterized in that, with the lid (5; 27) occupying the closed position, at least one part of the free edge (8a) afforded by the open end (4) of the container (3; 26) and a part of the free edge (11a) of the lid (5; 27) are separated one

from the other by a predetermined distance so as to create an opening (20) that serves to expose at least one void portion of the frame (15) serving in turn to reveal at least one corresponding portion (24) of the coupon (19).

2) A pack as in claim 1, wherein the void portion consists in an area compassed between a part of the free edge (11a) presented by the front face (11) of the lid (5; 27) and the uppermost edge (18) of U profile presented by the breast piece (16) of the frame (15).

3) A pack as in claim 1, wherein the void portion consists in at least one window (23) pierced in the breast piece (16) of the frame (15).

4) A pack of rigid type with a hinged lid for tobacco products, typically a pack (1) comprising a container (3; 26) of cupped embodiment presenting a bottom end face (7) and a rear face (9), also a front face (8) and two flank faces (10) of which the free edges (8a, 10a) define an open end (4) of the selfsame container (3; 26); a reinforcing frame (15) presenting a breast piece (16) and two side pieces (17) associated respectively with the front face (8) and flank faces (10) of the container (3; 26), projecting partly from the open end (4) of the container and delimited uppermost by an edge (18) of U profile directed toward the lid (5; 27); the

lid (5; 27) likewise of cupped embodiment and presenting a top end face (14), a front face (11) and two flank faces (13) with respective free edges (11a, 13a), and a rear face (12) connected by way of a hinge line (6) to the rear face (9) of the container (3; 26), rotatable thus between an open position and a position of interaction with the frame (15) in which the open end (4) of the container is closed (3; 26), characterized in that it comprises a coupon (19) interposed between the breast piece (16) of the frame (15) and the inside of the front face (8) presented by the container (3; 26), and in that with the lid (5; 27) occupying the closed position, at least one part of the free edge (8a) afforded by the open end (4) of the container (3; 26) and a part of the free edge (11a) of the lid (5; 27) are separated one from the other by a predetermined distance so as to create an opening (20) that serves to reveal at least one corresponding portion (24) of the coupon (19).

5) A pack as in claims 1 to 4, wherein the opening (20) appears as a substantially rectangular band aligned on an axis extending parallel with the hinge line (6).

6) A pack as in claims 1 to 4, wherein the opening (20) appears as a curved band aligned on an arc to a circle and with parallel edges (8a, 11a).



7) A pack as in claims 1 to 4, wherein the opening (20) appears as a Vee-shaped band with parallel edges (8a, 11a).

5 8) A pack as in claims 1 to 4, wherein the opening (20) appears as a substantially rectangular band aligned on an axis extending skew relative to the hinge line (6).

10 9) A pack as in claims 1 to 4, wherein the opening (20) appears as a substantially undulating band with parallel edges (8a, 11a).

10) A pack as in claims 1 to 4, wherein the opening (20) appears as a substantially multiangular band with parallel edges (8a, 11a).

15 11) A pack as in claims 1 to 4, wherein the opening (20) appears as a substantially multiangular band with non-parallel edges (8a, 11a).

20 12) A pack as in claims 1 to 11, wherein the tobacco products consist in a plurality of packets (2) of cigarettes and the pack (1) is a carton (25).

13) A pack as in claims 1 to 11, wherein the tobacco products consist in a group of cigarettes, and the pack (1) is a packet (2) of cigarettes.

1/7

FIG. 1



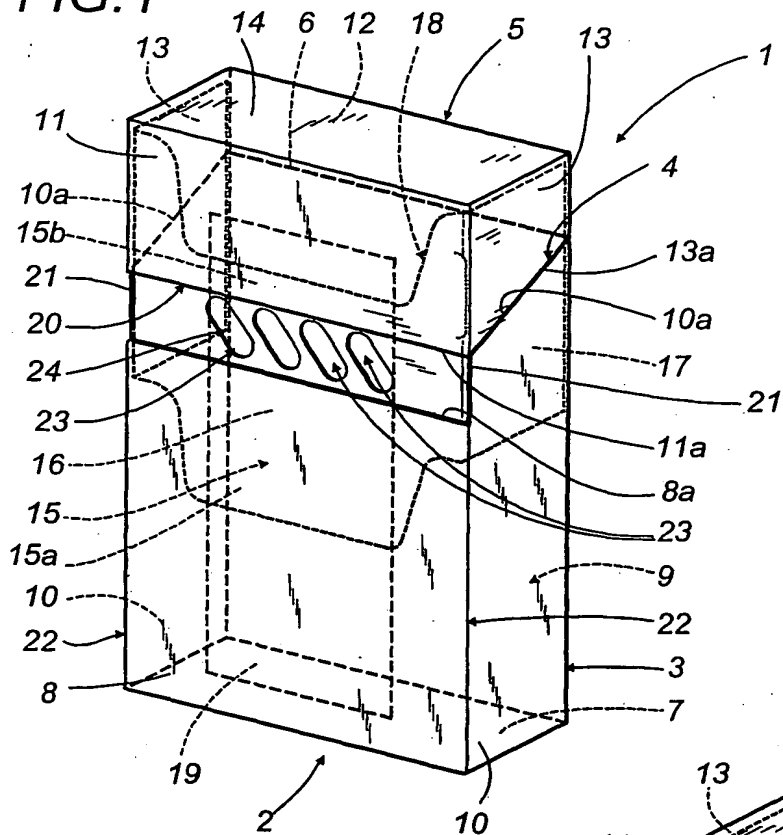



FIG. 2

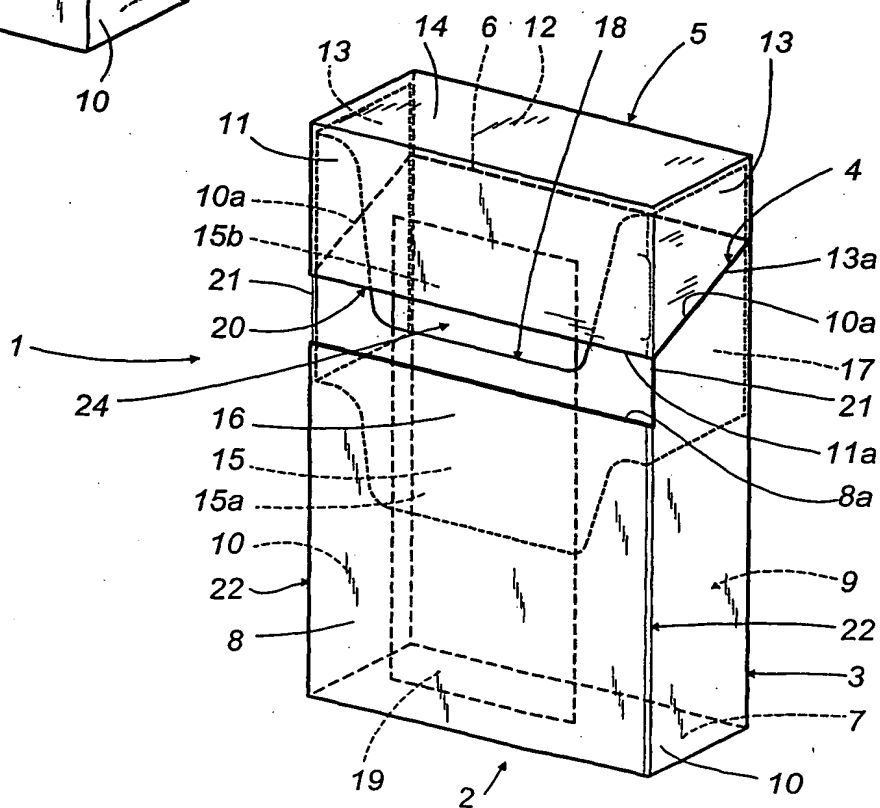


**FIG.3**

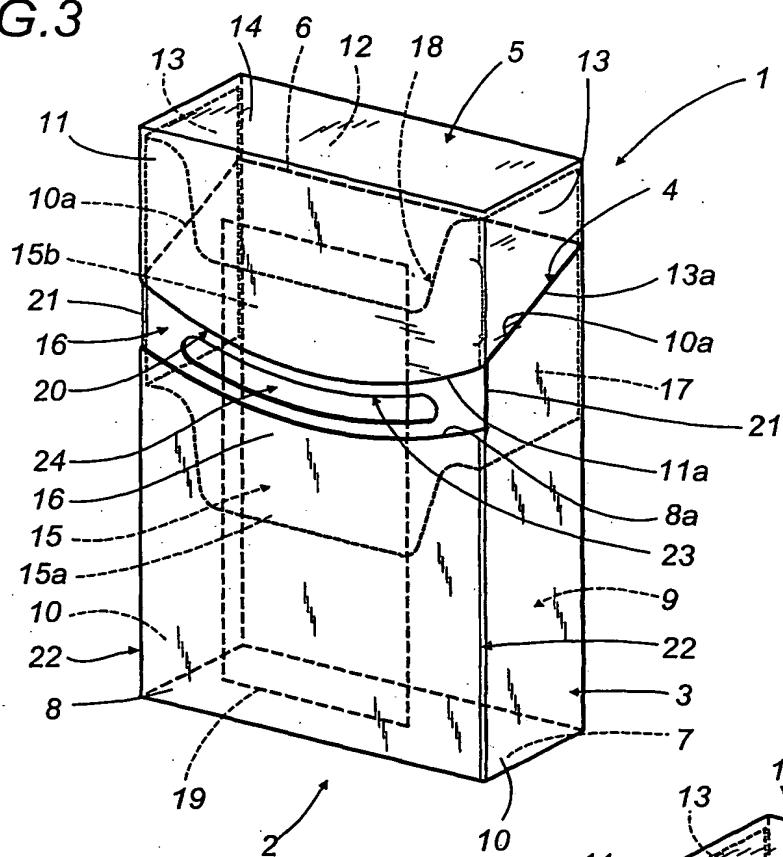


**FIG.4**

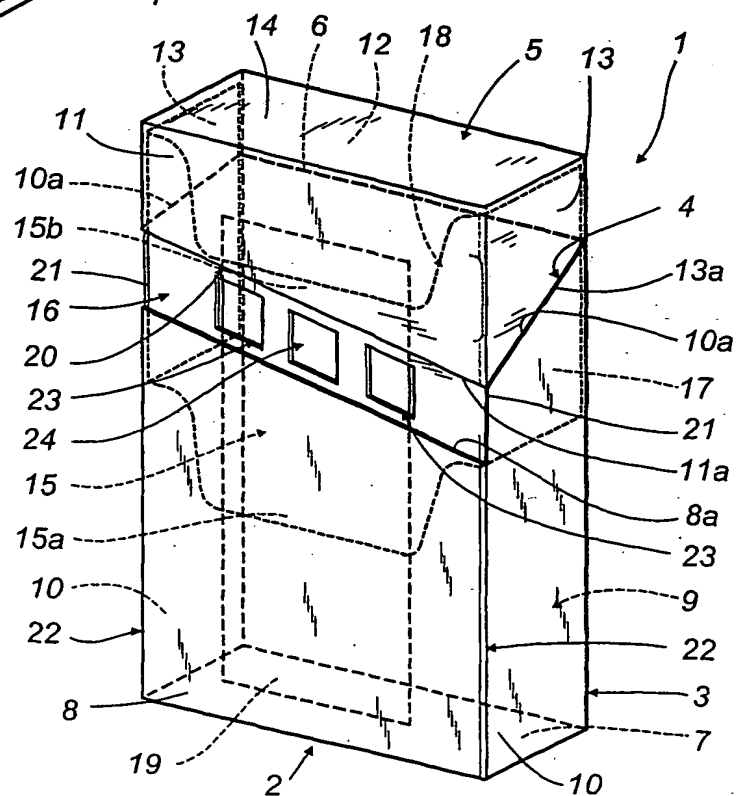

**FIG.5**

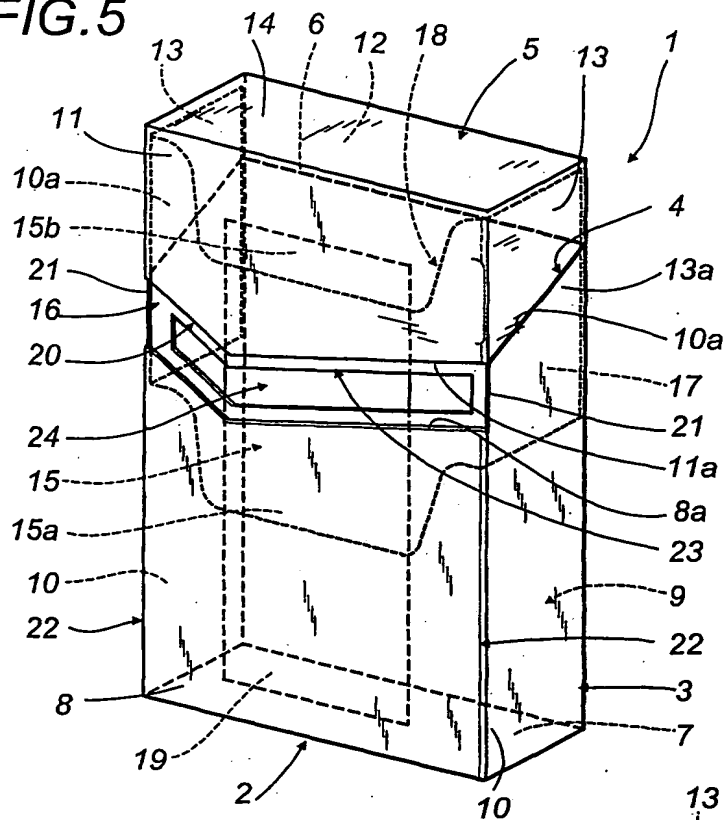


**FIG.6**

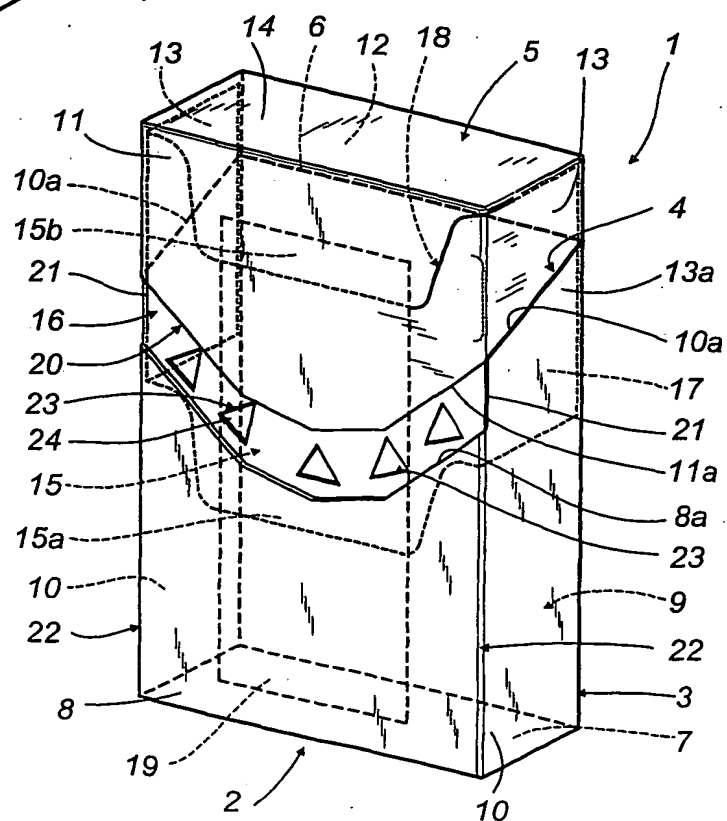


4/7

**FIG. 7.**

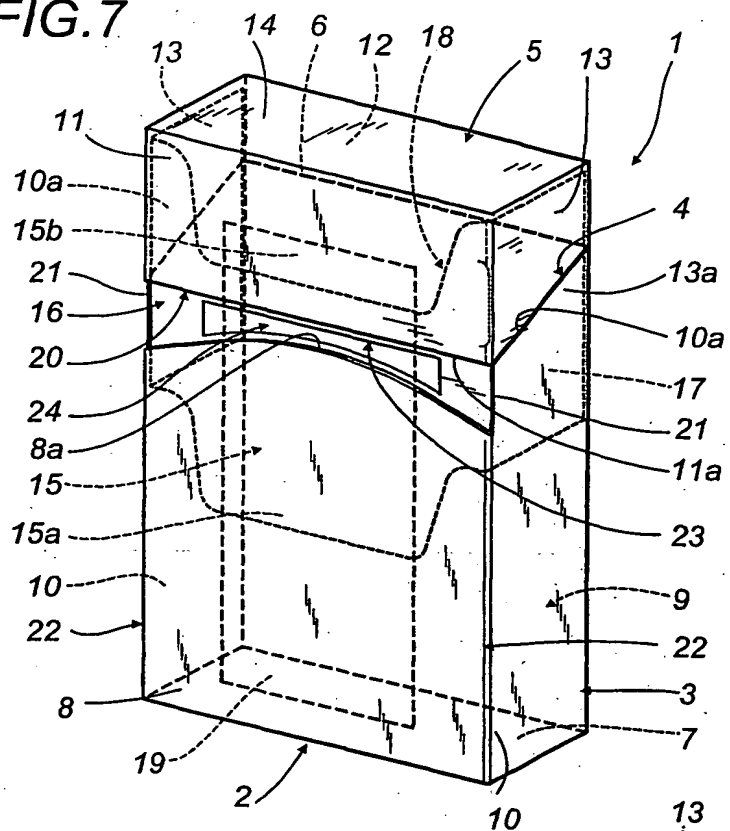


**FIG.8**

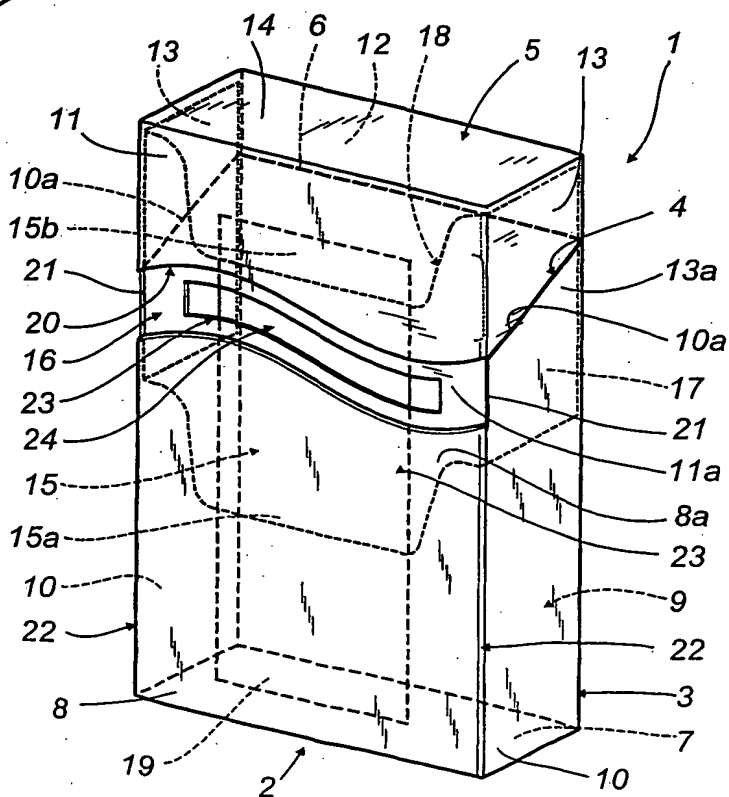


**5/7**

**FIG.9**

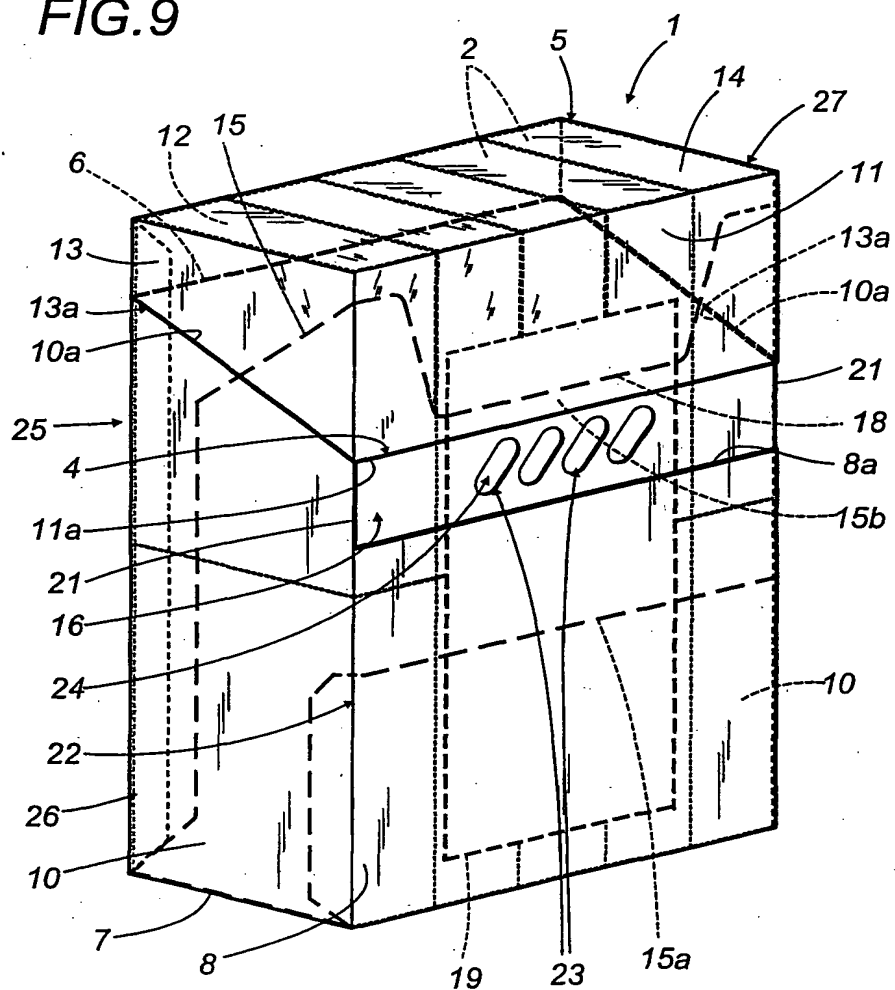


6/7

**FIG. 10**

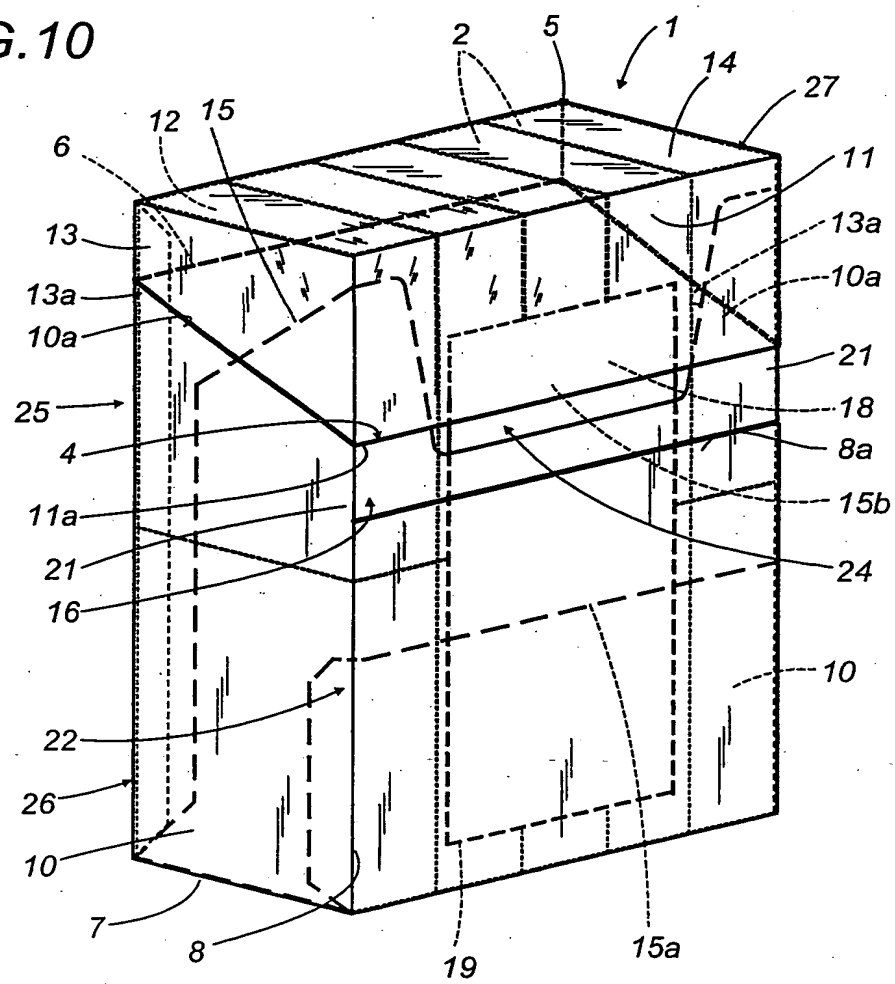

**FIG.11**

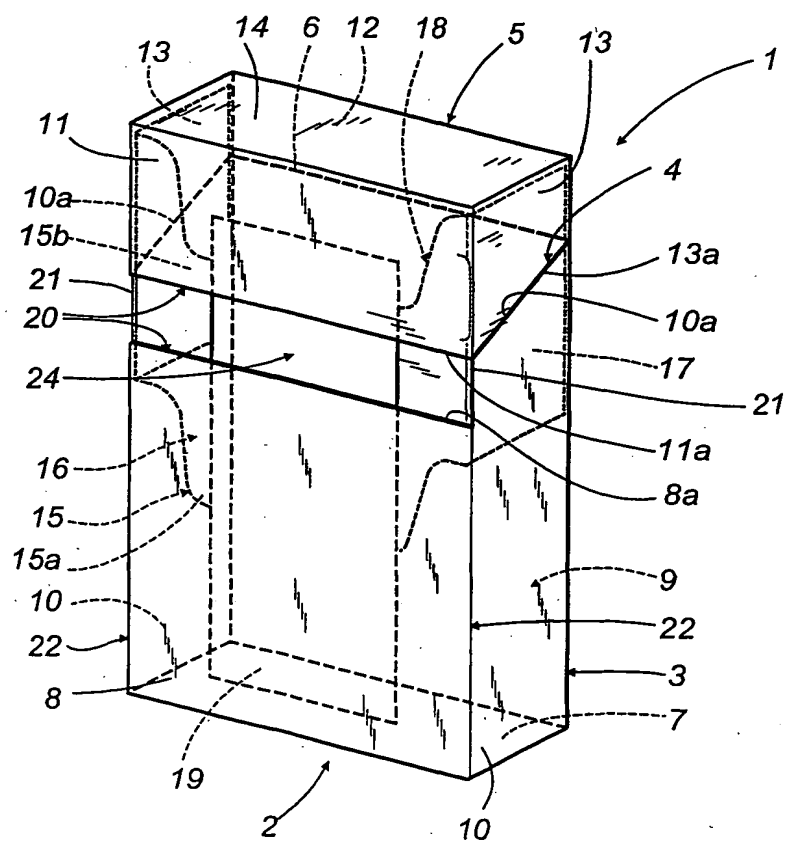



## INTERNATIONAL SEARCH REPORT

 Int'l Application No  
 PCT/IB 01/01821

 A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 B65D85/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

 Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 B65D A24F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	WO 01 12528 A (FOCKE HEINZ ; BUSE HENRY (DE); FOCKE & CO (DE); STEINKAMP IRMIN (DE) 22 February 2001 (2001-02-22) abstract; figures 1,2,5,6,9	4
A	US 5 375 704 A (FOCKE HEINZ ET AL) 27 December 1994 (1994-12-27) abstract; figures 1,4	4
A	US 5 715 936 A (FOCKE HEINZ ET AL) 10 February 1998 (1998-02-10) figure 6	1
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

5 December 2001

Date of mailing of the international search report

12/12/2001

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Martínez Navarro, A.

## INTERNATIONAL SEARCH REPORT

In International Application No

PCT/IB 01/01821

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00 05151 A (IMP TOBACCO CO LTD ;LUTON COLIN DENNIS (GB); TAYLOR RODNEY GEORGE) 3 February 2000 (2000-02-03) page 5, line 10 - line 20 page 6, line 6 - line 15 figure 2 -----	4
A	US 5 236 084 A (EVERS DONALD H) 17 August 1993 (1993-08-17) abstract; figures 4-6 -----	4
A	DE 198 41 942 A (FOCKE & CO) 16 March 2000 (2000-03-16) figures 1-3 -----	1
A	DE 199 06 473 A (FOCKE & CO) 24 August 2000 (2000-08-24) -----	
A	DE 198 58 786 A (FOCKE & CO) 15 June 2000 (2000-06-15) -----	
A	EP 0 087 081 A (BAT CIGARETTENFAB GMBH) 31 August 1983 (1983-08-31) -----	

## INTERNATIONAL SEARCH REPORT

Information on patent family members

Int Application No

PCT/IB 01/01821

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 0112528	A	22-02-2001	DE	19938196 A1	22-02-2001
			AU	6826800 A	13-03-2001
			WO	0112528 A1	22-02-2001
US 5375704	A	27-12-1994	DE	4237523 A1	11-05-1994
			BR	9304480 A	10-05-1994
			CA	2108085 A1	07-05-1994
			CN	1091386 A ,B	31-08-1994
			DE	59309208 D1	21-01-1999
			EP	0596225 A2	11-05-1994
			ES	2124759 T3	16-02-1999
			JP	2635506 B2	30-07-1997
			JP	6219451 A	09-08-1994
US 5715936	A	10-02-1998	DE	19506844 A1	29-08-1996
			GB	2298414 A ,B	04-09-1996
			IT	MI960296 A1	18-08-1997
			JP	8253279 A	01-10-1996
WO 0005151	A	03-02-2000	AU	4634099 A	14-02-2000
			BR	9912287 A	17-04-2001
			CN	1311747 T	05-09-2001
			EP	1098825 A1	16-05-2001
			WO	0005151 A1	03-02-2000
			NO	20010325 A	19-01-2001
US 5236084	A	17-08-1993	WO	9429193 A1	22-12-1994
			EP	0655046 A1	31-05-1995
			GR	3030215 T3	31-08-1999
			DE	69324146 D1	29-04-1999
			DE	69324146 T2	14-10-1999
			DK	655046 T3	11-10-1999
			JP	8502228 T	12-03-1996
			MD	1550 F2	31-10-2000
DE 19841942	A	16-03-2000	DE	19841942 A1	16-03-2000
			AU	5414999 A	03-04-2000
			BR	9913693 A	05-06-2001
			CN	1318029 T	17-10-2001
			WO	0015521 A1	23-03-2000
			EP	1113971 A1	11-07-2001
DE 19906473	A	24-08-2000	DE	19906473 A1	24-08-2000
			AU	1864900 A	04-09-2000
			WO	0048926 A1	24-08-2000
			EP	1152961 A1	14-11-2001
DE 19858786	A	15-06-2000	DE	19858786 A1	15-06-2000
			AU	1558000 A	26-06-2000
			BR	9916072 A	04-09-2001
			WO	0034150 A1	15-06-2000
			EP	1140661 A1	10-10-2001
EP 0087081	A	31-08-1983	DE	3206078 C1	21-07-1983
			EP	0087081 A1	31-08-1983